

Condenser Coil

Type CX

Primary Surface

Round seamless copper tubes are mechanically expanded into the fin collars of the secondary surface. The mechanical expansion provides a permanent metal-to-metal bond for efficient heat transfer. Tubes are staggered in the direction of airflow.

Secondary Surface

Corrugated aluminum or copper plate type fin that is die-formed. Fin collars are full-drawn to provide accurate control of fin spacing and maximum contact with tubes.

Headers


Seamless copper with die-formed holes that provide a parallel surface to the coil tube for strong brazing joints.

Connections

Copper outside diameter (O.D.) Sweat with standard arrangement for one compressor circuit. FACE SPLIT circuiting available for two or more compressors.


Casing

Casing is die-formed with 1½" flanges to permit easy stacking and mounting. Intermediate tube supports are supplied on coils over 44" fin length with an additional support every 42".

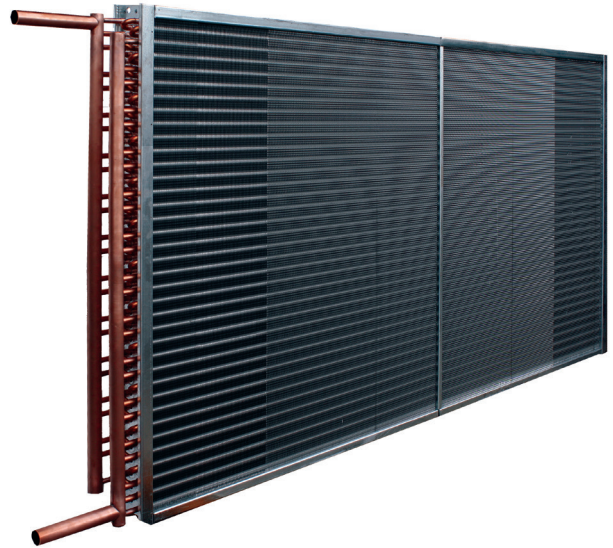

Circuiting

Coil circuiting options include: full face (std.) and horizontal (face) split.



Standard

Horizontal (Face) Split

Testing

All coil assemblies are leak tested under water with nitrogen at 400 PSIG.

Coil Options

Rows	Fin Height	Fin Length	Fin Spacing	Fin Thickness ALUMINUM	Fin Thickness COPPER	Tube O.D. Tube Thickness	Tube Spacing Face x Row	Casing	Max. Std. Operating Conditions
1,2,3,4,5,6,8,10,12	6" to 60"	12" to 157"	1/2" 8 to 14 fins per inch 5/8" 6 to 14 fins per inch	1/2" 0.006" 5/8" 0.008" 0.010"	1/2" 0.006" 5/8" 0.006" 0.008" 0.010"	1/2" 0.017" 0.025" 5/8" 0.020" 0.025"	1/2" 1.25"x1.083" 5/8" 1.50"x1.299"	16 or 14 GA Galvanized Steel 304, 316 Stainless Steel	250 PSIG



Specifications and illustrations subject to change without notice and without incurring obligation.

www.nortekair.com
nortekairinfo@nortek.com

© Nortek Air Solutions, LLC 2019. All Rights Reserved.
174F-0519 (Replaces 174F-0418)

Temtrol® is a registered trademark of Nortek Air Solutions, LLC.

