

Water Booster Coil

Type WC

Primary Surface

Round seamless copper tubes are mechanically expanded into the fin collars of the secondary surface. The mechanical expansion provides a permanent metal-to-metal bond for efficient heat transfer. Tubes are staggered in the direction of airflow and only RETURN BENDS are used to ensure NO reduction in tube wall thickness in the bend radius associated with hairpin tubes.

Secondary Surface

Corrugated aluminum or copper plate type fin that is die-formed. Fin collars are full-drawn to provide accurate control of fin spacing and maximum contact with tubes.

Headers


(When furnished) are seamless copper with die-formed holes that provide a parallel surface to the coil tube for strong brazing joints. All circuiting is designed to gravity-drain with the coil mounted vertically and tubes running horizontally.

Connections

Wrot copper male pipe thread (MPT).

Coil Options

Rows	Fin Height	Fin Length	Fin Spacing	Fin Thickness ALUMINUM	Fin Thickness COPPER	Tube O.D. Tube Thickness	Tube Spacing Face x Row	Casing	Max. Std. Operating Conditions
1,2	6" to 18"	6" to 48"	1/2"	1/2"	1/2"	1/2"	1/2"	16 or 14 GA Galvanized Steel 304, 316 Stainless Steel	250 PSIG 300° F
			8 to 14 fins per inch	0.006"	0.006"	0.017"	1.25"/1.083"		
			5/8"	5/8"	5/8"	5/8"	5/8"		
			0.008"	0.006"	0.020"	0.025"	1.50"x1.299"		
			0.010"	0.008"	0.025"	0.035"			
			6 to 14 fins per inch	0.010"	0.049"				

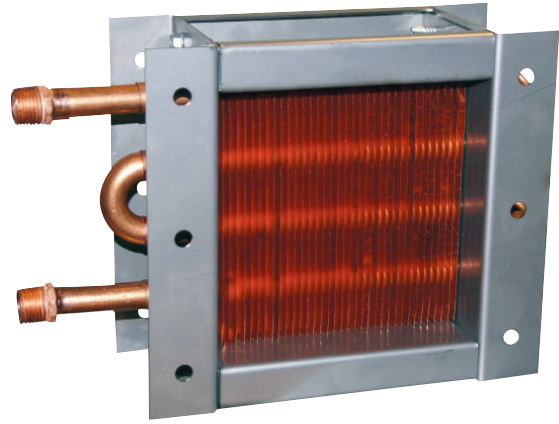

Casing

Casing is die-formed with 1½" flanges to permit easy stacking and mounting. Intermediate tube supports are supplied on coils over 44" fin length with an additional support every 42".

Testing and Performance

All coil assemblies are leak tested under water with dry air at 500 PSIG.

Performance is AHRI Certified™ to Air-Cooling and Air-Heating Coils AHRI Standard 410. Coil performance ratings are calculated using Ventrol AHRI Certified™ selection software.



nortekair.com



Specifications and illustrations subject to change without notice and without incurring obligation.

© Nortek Air Solutions, LLC 2023. All Rights Reserved.
498F-0819

